


## ERGONOMIC SCISSOR LIFTS



- Versatile production tool for changing line elevation or ergonomic lifting
- An economical option to decrease worker fatigue 2,000 to 6,000 lbs. standard load capacities with a variety of travels and platform sizes available
- Common applications include workstations for assembly, welding processes, heavy product manufacturing or work platforms

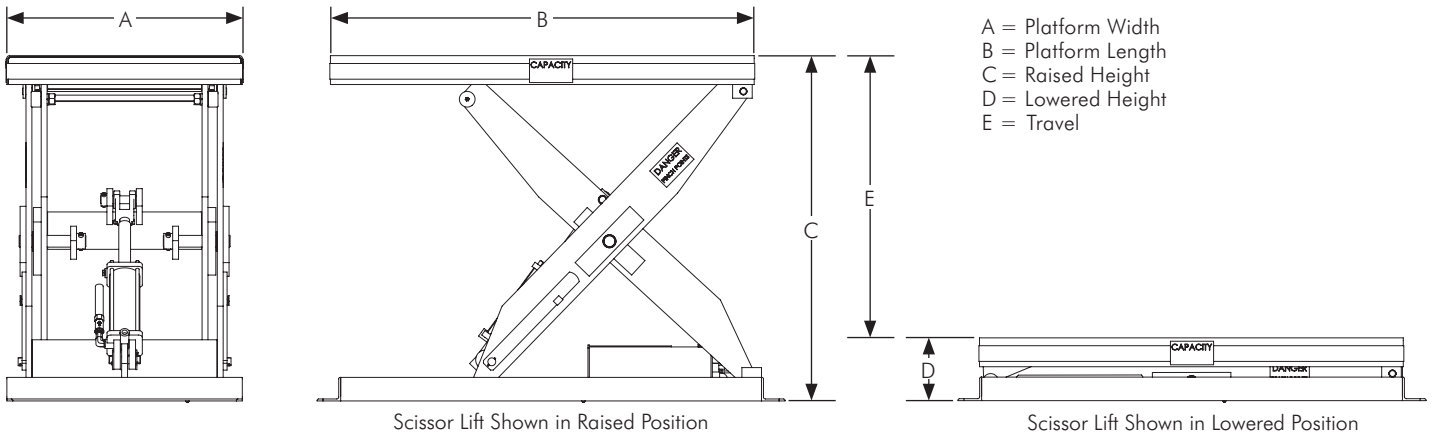

LOAD CAPACITY (lbs.)	LOWERED HEIGHT (in.) (D)	TRAVEL (in.) (E)	RAISED HEIGHT (in.) (C)	PLATFORM DIMENSIONS (A X B) (in.)		LIFTING SPEED (SECONDS)	STANDARD MOTOR (HP)	STANDARD VOLTAGE/ PHASE/HZ
				STANDARD	MAXIMUM			
<b>36" TRAVEL</b>								
2000	7.375	36	43.375	24 x 48	48 x 72	21	1 (Internal)	115/1/60
4000	7.375	36	43.375	24 x 48	48 x 72	42	1 (Internal)	115/1/60
<b>24" TRAVEL</b>								
2000	8	24	32	30 x 50	54 x 74	14	1 (Internal)	115/1/60
4000	8	24	32	30 x 50	54 x 74	28	1 (Internal)	115/1/60
6000	8	24	32	30 x 50	54 x 74	42	1 (Internal)	115/1/60
<b>36" TRAVEL</b>								
2000	8	36	44	30 x 54	54 x 78	21	1 (Internal)	115/1/60
4000	8	36	44	30 x 54	54 x 78	42	1 (Internal)	115/1/60
6000	8	36	44	30 x 54	54 x 78	63	1 (Internal)	115/1/60
<b>48" TRAVEL</b>								
2000	8	48	56	30 x 66	54 x 96	24	1 (Internal)	115/1/60
4000	8	48	56	30 x 66	54 x 96	48	1 (Internal)	115/1/60
6000	8	48	56	30 x 66	54 x 96	72	1 (Internal)	115/1/60
<b>60" TRAVEL</b>								
2000	10	60	70	30 x 86	54 x 108	16	3 (External)	240,460/3/60
4000	10	60	70	30 x 86	54 x 108	32	3 (External)	240,460/3/60
6000	10	60	70	30 x 86	54 x 108	48	3 (External)	240,460/3/60
<b>72" TRAVEL</b>								
2000	10	72	82	30 x 102	54 x 120	16	3 (External)	240,460/3/60
4000	10	72	82	30 x 102	54 x 120	32	3 (External)	240,460/3/60
6000	12	72	84	30 x 102	54 x 120	48	3 (External)	240,460/3/60