

SCISSOR LIFT QUOTATION WORKSHEET

Company _____ Date _____
 Contact _____ Desired Delivery _____
 Phone No. _____ Contact Email _____ State _____

APPLICATION INFORMATION

How is lift to be used? _____

Equipment mounted to platform: _____

Product description: _____

Size: _____ W x _____ L x _____ H, WT = _____ LB

Scissor Lift Information:

Quantity: _____ Capacity: _____ Platform Size: _____ W x _____ L

Height Info.: Raised _____
 Lowered _____
 Travel _____

Cycle Info.: Cycles/Hour _____
 Raise Time _____ sec.

Other: _____

SPECIFICATIONS

Power Unit:

- External
- Internal
- None

Plant Voltage:

- 110V Single Phase
- 220V Single Phase
- 220V Three Phase
- 440V Three Phase
- 208V Single Phase
- 575V Three Phase

Control Voltage:



- 120VAC
- 24VDC
- 24VDC PLC Supplied By Customer

Controls:

- Foot Pedal
- Hand Held Pendant
- No Controller
- Less All Electrical

Options:

- Pit Mount
- Velocity Fuses
- Travel Stop (Limit/Prox)
- Regreasable
- Portable
- Skirting

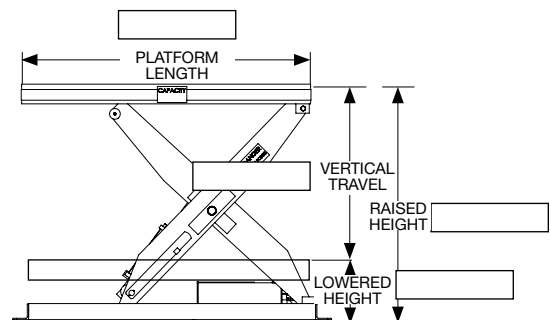

SCISSOR LIFT SHOWN IN RAISED POSITION